Southern Illinois University Carbondale
OpenSIUC

Articles

Department of Electrical and Computer Engineering

2-1996

The RCS of a Microstrip Antenna on an In-Plane Biased Ferrite Substrate

Byungje Lee
Southern Illinois University Carbondale

Frances J. Harackiewicz
Southern Illinois University Carbondale, fran@engr.siu.edu

Follow this and additional works at: http://opensiuc.lib.siu.edu/ece_articles
Published in Lee, B., & Harackiewicz, F.J. (1996). The RCS of a microstrip antenna on an in-plane biased ferrite substrate. *IEEE Transactions on Antennas and Propagation, 44*(2), 208 - 211. doi: 10.1109/8.481649 ©1996 IEEE. Personal use of this material is permitted. However, permission to reprint/republish this material for advertising or promotional purposes or for creating new collective works for resale or redistribution to servers or lists, or to reuse any copyrighted component of this work in other works must be obtained from the IEEE. This material is presented to ensure timely dissemination of scholarly and technical work. Copyright and all rights therein are retained by authors or by other copyright holders. All persons copying this information are expected to adhere to the terms and constraints invoked by each author's copyright. In most cases, these works may not be reposted without the explicit permission of the copyright holder.

Recommended Citation
Lee, Byungje and Harackiewicz, Frances J., "The RCS of a Microstrip Antenna on an In-Plane Biased Ferrite Substrate" (1996). *Articles.* Paper 4.
http://opensiuc.lib.siu.edu/ece_articles/4

This Article is brought to you for free and open access by the Department of Electrical and Computer Engineering at OpenSIUC. It has been accepted for inclusion in Articles by an authorized administrator of OpenSIUC. For more information, please contact opensiuc@lib.siu.edu.

The RCS of a Microstrip Antenna on an In-Plane Biased Ferrite Substrate

Byungje Lee, *Student Member, IEEE*, and Frances J. Harackiewicz, *Member, IEEE*

***Abstract*—The numerical solutions for the RCS of a microstrip patch on an in-plane biased ferrite substrate are presented. The peaks in the RCS can be moved with respect to frequency by changing the magnetic bias field. We consider a monostatic RCS with various incident angles and examine all four elements of the cross-section matrix. For the case of an unmagnetized ferrite substrate the cross-polarized RCS components are zero. When the ferrite is magnetized, the cross-polarized RCS components become as significant as do the copolarized RCS components. It is also shown that a loaded patch has the effect of significantly reducing RCS at resonances. The analysis used is based on a full-wave moment method with the exact spectral-domain Green's function.**

I. Introduction

THE nonreciprocal property of ferrite materials has been used in microwave components for many years. More recently, the bias dependent property of ferrite materials has been used to control printed circuits and antennas [1]–[4]. The bias field can be in different directions. It has been demonstrated experimentally that the resonant frequency of a microstrip antenna printed on a ferrite substrate can be tuned over a 40% frequency range for an in-plane bias by adjusting the applied magnetic bias strength [5], and that the polarization can be changed with bias field also [6]. In [7]–[8], the RCS of a microstrip antenna on a ferrite substrate biased normally was discussed. In [9], one element of the RCS matrix of a microstrip patch on an arbitrarily biased ferrite substrate was presented. In practice, an in-plane bias would be easier to achieve than a normal bias because an in-plane bias allows two pole pieces of the magnet to be in close contact with the substrate [5]. Also, the in-plane external bias is equal to the internal bias for the case of an infinite substrate. The same is not true for the normal bias components since a normal external bias must oppose the internal magnetization of the substrate. Since the in-plane bias case seems to be of most practical interest, the monostatic RCS of a microstrip antenna on an in-plane biased ferrite substrate is considered in the present work. In this case, it is interesting to consider cross polarization of the scattered field since the polarization can change significantly with applied bias field as discussed in [6]. Thus, this work considers the full cross-section matrix.

Manuscript received May 9, 1994; revised February 27, 1995. This work was supported in part by an AFOSR Summer Faculty Research Extension Grant.

The authors are with the Department of Electrical Engineering, Southern Illinois University, Carbondale, IL 62901 USA.

Publisher Item Identifier S 0018-926X(96)01204-5.

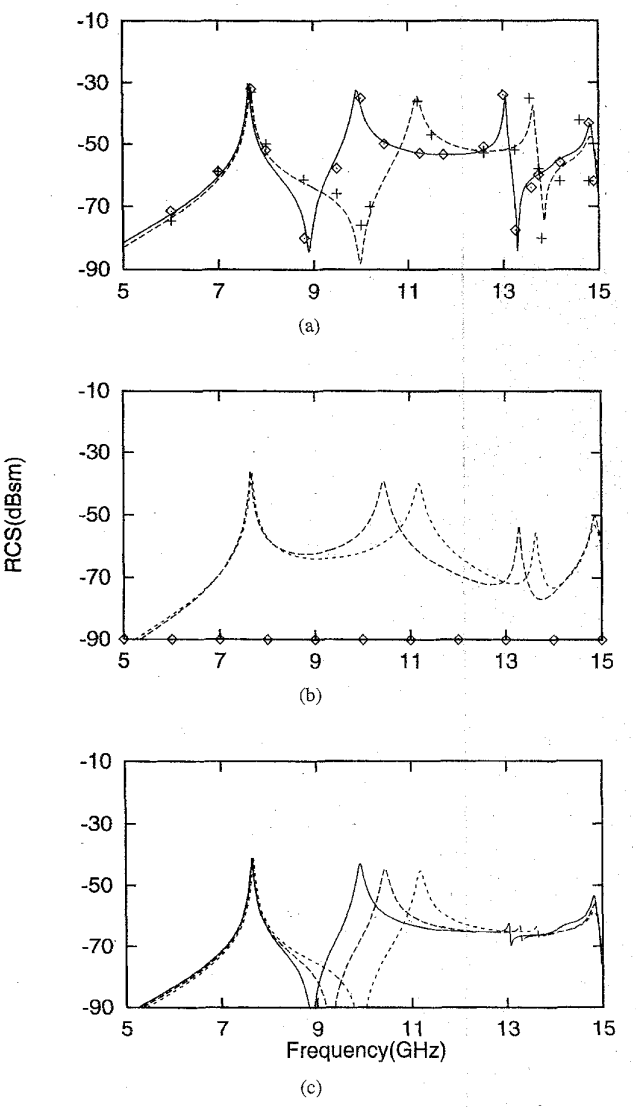

Fig. 1. All components of RCS of a microstrip patch on a ferrite substrate for different bias conditions with incident angle, $\theta = 60°$, $\phi = 45°$. (a) $\sigma_{\theta\theta}$: Unmagnetized: ——, ◇◇◇◇ in [9]; $H_0 = 360$ G: ------, + + ++ in [9] (b) $\sigma_{\phi\theta}$: Unmagnetized: ◇◇◇◇; Latched: ----; $H_0 = 360$ G: ------ (c) $\sigma_{\phi\phi}$: Unmagnetized: ——; Latched: ----; $H_0 = 360$ G: ------.

We also study the RCS properties of a loaded rectangular patch on a biased ferrite substrate. The present work uses an idealized-probe-feed model. This model should be adequate for an electrically thin substrate.

0018–926X/96$05.00 © 1996 IEEE

Authorized licensed use limited to: Southern Illinois University Carbondale. Downloaded on March 4, 2009 at 11:17 from IEEE Xplore. Restrictions apply.

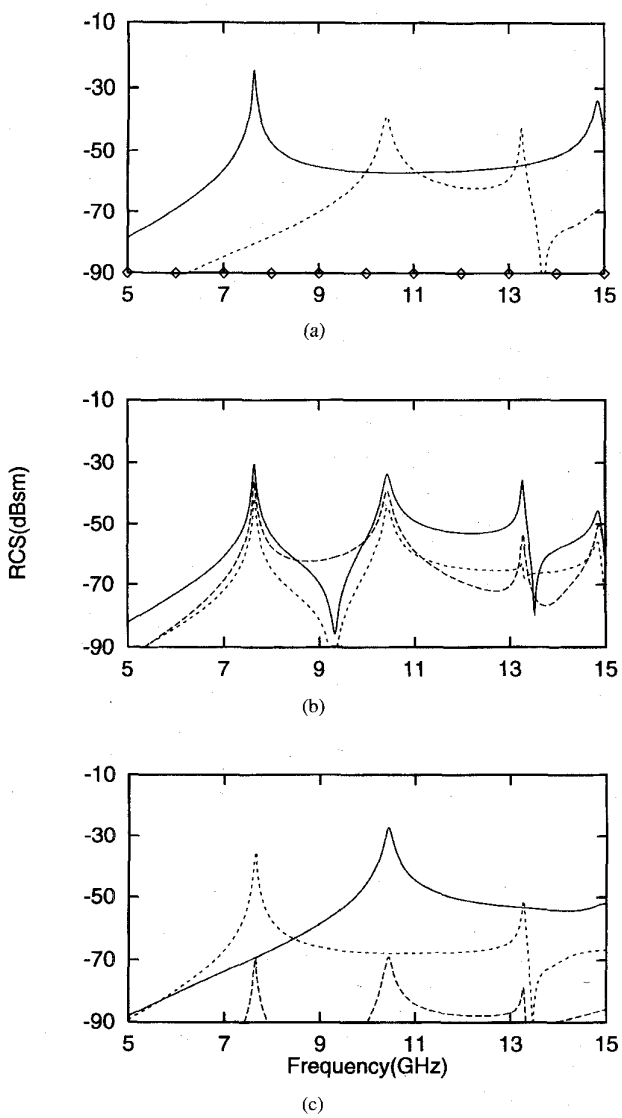

Fig. 2. All components of RCS of a microstrip patch on a latched ferrite substrate with various incident angles. ——: $\sigma_{\theta\theta}$, --- (◇◇◇): $\sigma_{\phi\theta}$, -----: $\sigma_{\phi\phi}$ (a) $\theta = 60°$, $\phi = 0°$, (b) $\theta = 60°$, $\phi = 45°$, and (c) $\theta = 60°$, $\phi = 90°$.

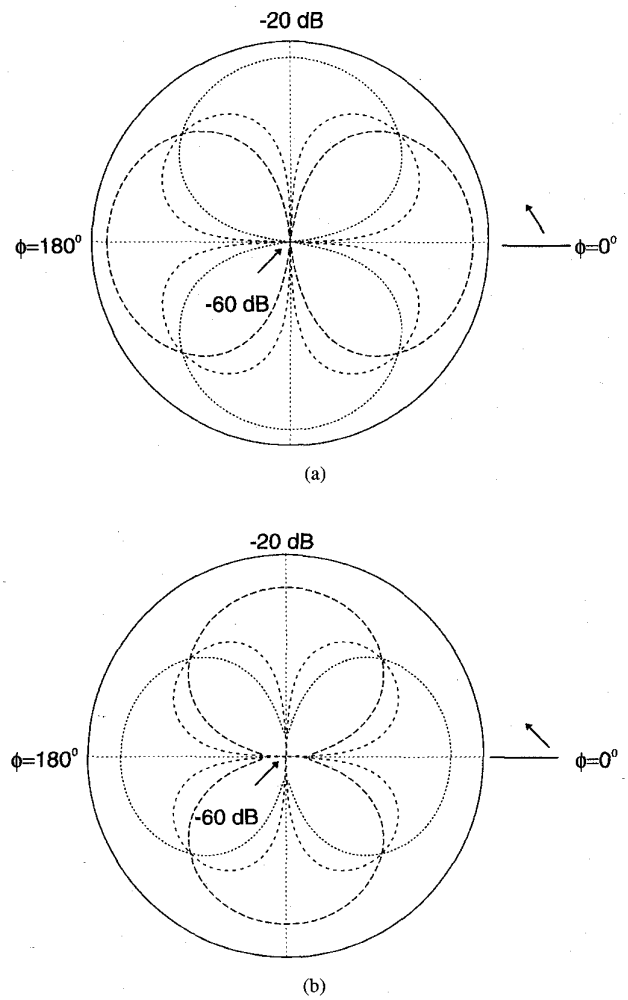

Fig. 3. RCS patterns of a latched ferrite patch antenna with incident angle, $\theta = 60°$. (a) $f = 7.65$ GHz and (b) $f = 10.44$ GHz ——— $\sigma_{\theta\theta}$ (dBsm), ----- $\sigma_{\phi\theta}$ (dBsm), ------ $\sigma_{\phi\phi}$ (dBsm).

II. Numerical Result and Discussion

To validate our results, numerical values of the RCS are compared against those in [9] and [10] for various bias conditions. In a limiting case, when the bias field H_0 and $4\pi M_s$ are both set to zero, the numerical Green's function and the RCS results are almost identical to those in [10] on a dielectric substrate and show a good agreement with that in [9]. Also in a magnetized state, the copolarized RCS component ($\sigma_{\theta\theta}$) show an excellent agreement with that in [9], as shown Fig. 1(a). The numerical integrations carried out to evaluate the impedance and voltage matrix use the complex integration path deformation technique to avoid surface wave poles as in [10]. Since most of the computational effort occurs in evaluating these integrals, interpolation of the elements between frequency points is used to save CPU time as in [10]. All numerical results were made by computing the impedance matrix every 0.1 GHz, and then using quadratic interpolation to approximate the impedance matrix at intervals of 0.01 GHz.

Here, we show the RCS response of a microstrip patch on an in-plane biased ferrite substrate, and show that the RCS peaks shift in frequency and are almost unchanged in amplitude by changing the magnetic bias field. The parameters used for the analysis of RCS of a patch on a ferrite substrate are $H_0 =$ 0 G, 360 G; $4\pi M_s = 1780$ G; $4\pi M_r = 1277$ G, $\varepsilon_r =$ 12.8; $\tan\delta = 0.0002$; $\Delta H = 45$; $Z_L = 50\Omega$; and $d =$ 0.6 mm. The microstrip patch has length $L = 0.55$ cm and width $W = 0.4$ cm. Fig. 1(a), (b), and (c) show all four elements of RCS matrix of a microstrip patch on a biased ferrite substrate with different bias conditions. The microstrip patch has two types of modes: one is the mode with its $\overline{H}$ perpendicular to the bias ($\perp$), and two is the mode with its $\overline{H}$ parallel to the bias ($||$). When the magnetic bias field becomes strong, the RCS peaks of $\perp$ modes shift to higher frequencies.

Authorized licensed use limited to: Southern Illinois University Carbondale. Downloaded on March 4, 2009 at 11:17 from IEEE Xplore. Restrictions apply.

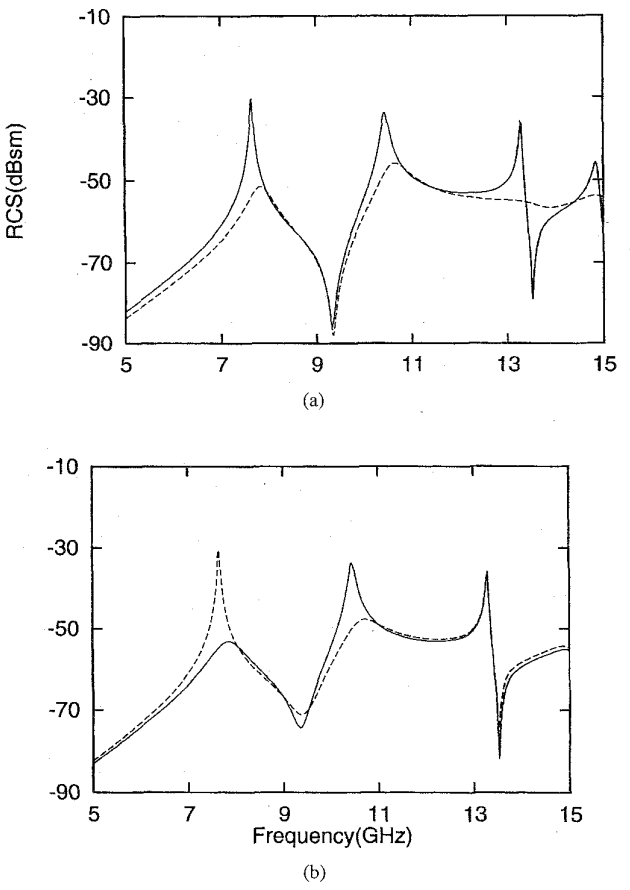

Fig. 4. RCS ($\sigma_{\theta\theta}$) of a microstrip patch on a latched ferrite substrate with matched load at incident angle, $\theta = 60°$, $\phi = 45°$. (a) Probe position $= (-L/6, -W/6)$ ——— (Load impedance, $Z_L = \infty$), --- (Load impedance, $Z_L = 50\,\Omega$) and (b) ———: Probe position $= (-L/6, 0)$, -----: Probe position $= (0, -L/6)$.

A great frequency shift can be obtained by increasing the magnetic bias strength. But the RCS peaks of || modes are almost unaffected by the bias field. Fig. 1(b) shows the cross-polarized RCS component. In the unmagnetized state, the cross-polarized RCS component has zero response. It is in a biased ferrite that cross-polarized scattering response is dramatically changed with respect to that of an unmagnetized state: the cross-polarized component $\sigma_{\theta\phi}$ is actually as high as the copolarized component level at the lower resonances. Fig. 2(a), (b), and (c) show all four components of the RCS of a microstrip patch on a latched ferrite substrate with different incident angles. The resonant peaks of $\sigma_{\theta\phi}$ are similar in amplitude to those of the copolarized components at $(\theta, \phi) = (60°, 45°)$ but very weak at $(\theta, \phi) = (60°, 0°)$ and $(60°, 90°)$. Since the cross-polarized RCS components do vary rapidly with angle ϕ, Fig. 3 shows the scattering pattern of a ferrite patch antenna. Fig. 3(a) and (b) show the monostatic RCS patterns of a latched ferrite patch antenna for the lowest || mode at $f = 7.65$ GHz and the lowest $\perp$ mode at $f = 10.44$ GHz, respectively. In the || mode, $\sigma_{\theta\theta}, \sigma_{\theta\phi}$, and $\sigma_{\phi\phi}$ are maximum at angles $\phi = 0°$ and 180°, at angles $\phi = 45°$, 135°, 225°, and 315°, and at angles $\phi = 90°$, and 270°, respectively. In the $\perp$ mode, $\sigma_{\theta\theta}, \sigma_{\theta\phi}$, and $\sigma_{\phi\phi}$ are maximum at angles $\phi = 90°$ and 270°, at angles $\phi = 45°$, 135°, 225°, and 315°, and at angles $\phi = 0°$ and 180°, respectively. In the previous cases, the RCS components were calculated with an open-circuit load, but in Fig. 4(a) and (b), $\sigma_{\theta\theta}$ is evaluated with a 50 Ω load. We observe that the load has the effect of reducing the level of the peaks in the RCS. In Fig. 4(a), the probe position is near a corner of the patch, so that the feed would influence virtually all of the modes. Fig. 4(b) shows the RCS of the microstrip patch on a biased ferrite for different probe positions. If the feed is located on the axis perpendicular to the bias, it would not couple to many of the $\perp$ modes, and thus not affect the peak RCS of those modes.

III. Conclusion

In this analysis, the full RCS matrices of loaded and unloaded microstrip patch antennas on in-plane biased ferrite substrates were analyzed for different bias conditions and incident angles. It was found that the $\perp$ mode's RCS peaks can be moved with respect to frequency and cannot be changed with respect to amplitude by changing the strength of the bias field. But the RCS peaks of || modes are almost unchanged by the bias field. It was also noticed that the cross-polarized RCS component can be significantly affected by bias field and incident angle. It was also observed that the load has the effect of reducing the peaks of the RCS. This work may be extended to analyze the RCS of arrays of printed antennas and multilayer ferrites and dielectrics. Bistatic RCS can be calculated by the same method as well.

References

[1] N. G. Alexopoulos, "Integrated-circuit structures on anisotropic substrates," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-33, pp. 847–881, Oct. 1985.

[2] H. Y. Yang, J. A. Castaneda, and N. G. Alexopoulos, "Multifunctional and low RCS nonreciprocal microstrip antennas," *Electromagn.*, vol. 12, no. 1, pp. 17–31, 1992.

[3] ———, "Infinite phased arrays of microstrip antennas on generalized anisotropic substrates," *Electromagn.*, vol. 11, no. 1, pp. 107–124, 1991.

[4] I. Y. Hsia and N. G. Alexopoulos, "Radiation characteristics of Hertzian dipole antennas in a nonreciprocal superstrate-substrate structure," *IEEE Trans. Antennas Propagat.*, vol. 40, no. 7, pp. 782–790, July 1992.

[5] D. M. Pozar and V. Sanchez, "Magnetic tuning of a microstrip antenna on a ferrite substrate," *Electron. Lett.*, vol. 24, pp. 729–731, June 1988.

[6] P. J. Rainville and F. J. Harackiewicz, "Magnetic tuning of a microstrip patch antenna fabricated on a ferrite film," *IEEE Microwave Guide Wave Lett.*, vol. 2, pp. 483–485, Dec. 1992.

[7] D. M. Pozar, "Radar cross-section of microstrip antenna on normally biased ferrite substrate," *Electron. Lett.*, vol. 25, no. 16, pp. 1079–1080, Aug. 1989.

[8] D. M. Pozar and D. H. Y. Yang, "Correction to radiation and scattering characteristics of microstrip antennas on normally biased ferrite substrates," *IEEE Trans. Antennas Propagat*, vol. 42, pp. 122–123, Jan. 1994.

[9] H.-Y. Yang, J. A. Castaneda, and N. G. Alexopoulos, "The RCS of a microstrip patch on an arbitrarily biased ferrite substrate," *IEEE Trans. Antennas Propagat.*, vol. 41, pp. 1610–1614, Dec. 1993.

[10] E. H. Newman and D. Forrai, "Scattering form an microstrip patch," *IEEE Trans. Antennas Propagat.*, vol. AP-35, no. 3, pp. 245–251, Mar. 1987.

Authorized licensed use limited to: Southern Illinois University Carbondale. Downloaded on March 4, 2009 at 11:17 from IEEE Xplore. Restrictions apply.



Byungje Lee (S'95) received the B.S. degree in electronic engineering from Kyungpook National University, Taegu, Korea, in 1988, and the M.S. degree from Southern Illinois University at Carbondale, Carbondale, IL, in 1994.

Currently, he is a Research and Teaching Assistant at Southern Illinois University studying as a Ph.D. student. His current research interests include microwave antennas and numerical methods in electromagnetics.

Frances J. Harackiewicz (S'82–M'90) was born in Holyoke, MA, in 1962. She received the B.S., M.S., and Ph.D. degrees in electrical engineering from the University of Massachusetts, Amherst, MA, in 1984, 1986, and 1990, respectively.

In 1989, she joined the Department of Electrical Engineering faculty at Southern Illinois University at Carbondale. As a graduate student, she spent one summer as an intern at Atlantic Aerospace Electronics Corporation, Greenbelt, MD. As a faculty member, she spent two summers as a Fellow at Rome Labs, Hanscom AFB, MA, and at NASA Lewis Research Center, Cleveland, OH. She is a Licensed Professional Engineer. Her research interests are mainly in computational electromagnetics, microstrip structures, and phased arrays.

Authorized licensed use limited to: Southern Illinois University Carbondale. Downloaded on March 4, 2009 at 11:17 from IEEE Xplore. Restrictions apply.